


## 5-Shelf Storage Rack

34"W x 14"D x 72"H

MODEL NUMBER

UR341472BLK

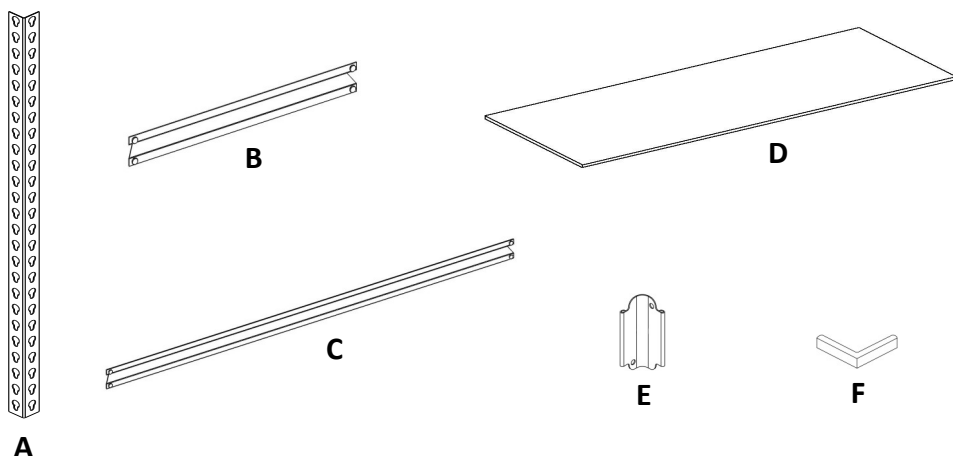

Part List		
Description	Qty	Part Number
A. Post	8	URPS36-BLK
B. Brace	10	URBR14-BLK
C. Beam	10	URBM34-BLK
D. Wood shelf	5	RPB31434
E. Post Connector	4	CPIN-BLK
F. Post Cap	8	RL-PC-B1

### IMPORTANT SAFETY INSTRUCTIONS



This unit should be placed on a level surface. Failure to do so can result in poor product performance or create a possible safety hazard. DO NOT CLIMB, STAND or USE THIS UNIT AS A LADDER. TO PREVENT TIPPING, ALWAYS SECURE TO A WALL WITH SUITABLE FASTENERS, NOT INCLUDED. DO NOT USE THIS UNIT TO STORE AQUARIUMS. CAUTION: CONTAINS SMALL PARTS, KEEP CHILDREN AWAY DURING INSTALLATION. USE TWO OR MORE PEOPLE TO ASSEMBLE AND MOVE THE UNIT TO AVOID INJURY. Do not use this unit for anything other than the manufacturer's intended purpose. Use care when working with metal parts, wear gloves for protection. Periodically inspect the unit to ensure brace/beam rivets are properly seated into post slots. Evenly distribute weight loads across entire shelf surface. Always store larger, heavier items on the bottom levels and small lighter items on the upper levels. Keep this manual for future reference.

### GENERAL INSTRUCTIONS

Assembly of this unit is done by fitting the two rivets of the braces (B) and beams (C) into the keyhole slots of the post (A). The narrow end of the keyhole slots from the post must face down (see 1-a). Braces and beams must be installed with the ledge facing up on the inside. Assemble the unit from bottom to top. It is recommended that the bottom shelf assembly be installed into the second keyhole slots at the bottom of the posts. The middle shelves should be evenly spaced. A rubber mallet should be used to tap down on the top of the braces and beams to properly seat the rivets down into the narrow end of the keyhole slots.

*Alternate configuration option:* can be assembled as two individual 36" high shelving units (see 1-b). One unit will have 3 shelves and the other will have 2 shelves. Follow assembly steps 1 and 2, repeating until all shelf levels are completed for both units. Note: Post Connectors (E) are not used for this setup.

Helpful Tools/Items for assembly (not included): Rubber Mallet and Gloves

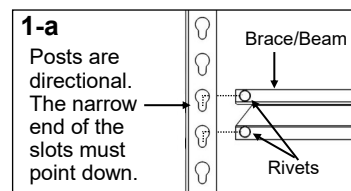

### WARRANTY

Edsal Manufacturing Company, LLC products are guaranteed for a period of one (1) year from the date of purchase. The SOLE AND EXCLUSIVE REMEDY for such defects is the repair or replacement of a defective product or parts thereof by Edsal Manufacturing Company, LLC or, at Edsal Manufacturing Company, LLC option, refund of the purchase price upon return of the item to Edsal Manufacturing Company, LLC. This warranty shall not apply in the event the products are damaged as a result of misuse, neglect, accident, moisture, improper application, improper assembly, or assembly not in conformity with the instructions of Edsal Manufacturing Company, LLC, failure to abide by safety precautions prescribed by Edsal Manufacturing Company, LLC or modification or repair by persons not authorized by Edsal Manufacturing Company, LLC.

Should you have any comments, damage, missing parts, or problems with assembly of this unit contact us:

Chat: [www.edsal.com](http://www.edsal.com)

Email: [support@edsal.com](mailto:support@edsal.com)

To obtain replacement parts please provide: Model Number, Part Number & Description, Location Purchased, and Date Purchased

**Edsal Manufacturing Co. LLC**  
1555 W. 44th Street  
Chicago, IL 60609

US Patents & Patents Pending

Rev: C062822-R


# ASSEMBLY INSTRUCTIONS

## Step


# 1

**Figure C**


Posts are directional. The narrow end of the slots must point down.

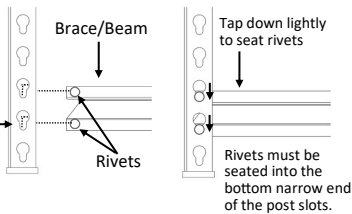


**Figure A**



**Figure B**



**Figure D**




Begin by placing four (4) post caps to the bottom of four posts (see figure A). Next, assemble two (2) post with one (1) brace. Skipping one slot from the bottom of the post (see figure B), place the rivets into post with the narrow end of the slots pointing down, and with the shelf ledge of the brace facing up (see figure C). Tap lightly on the top edge of the brace to seat rivets. Repeat with two (2) post and one (1) brace. Next assemble the two (2) post units with two (2) beams, skipping one slot from the bottom of the post (see figure D). Place the rivets into post with the narrow end of the slots pointing down, and with the shelf ledge of the brace facing up (see figure C). Tap lightly on the top edge of the beam to seat rivets.


## Step

# 2

**Figure E**



**Figure F**

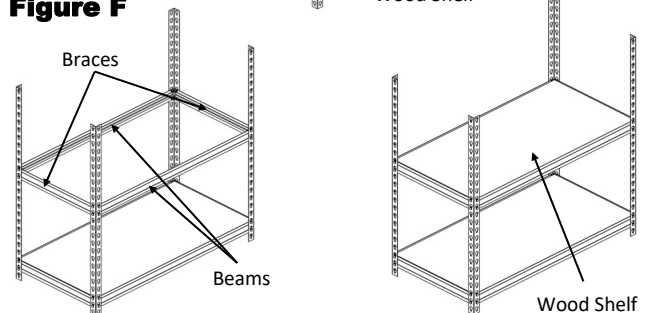


Add a wood shelf to the level previously built (see Figure E), then continue working by adding the second level using two (2) beams and two (2) braces in the post slots of your desired location (see Figure F). Again, place the rivets of the beams and braces into the post slots with the shelf ledge facing up and tap lightly to seat the rivets. Add a wood shelf to the second level.

## Step


# 3

Note: Posts are directional. The narrow end of slots must point down.

**Figure G**

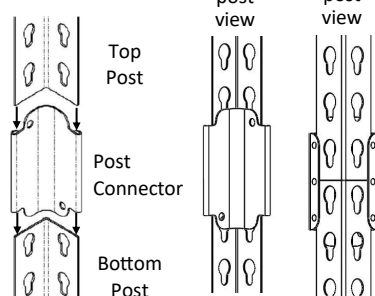

**Figure H**




Assemble the remaining four (4) posts to the assembled bottom post by using four (4) post connectors. Insert one (1) post connector into the top of each assembled bottom post, tap lightly down. Next insert the remaining four (4) posts into each one of the assembled post connectors. Tap down to properly seat (see figure G). Continue by adding the third shelf level using two (2) beams and two (2) braces just above the inside post couplers (see figure H). Again tap lightly to seat the rivets.


## Step

# 4

**Figure I**

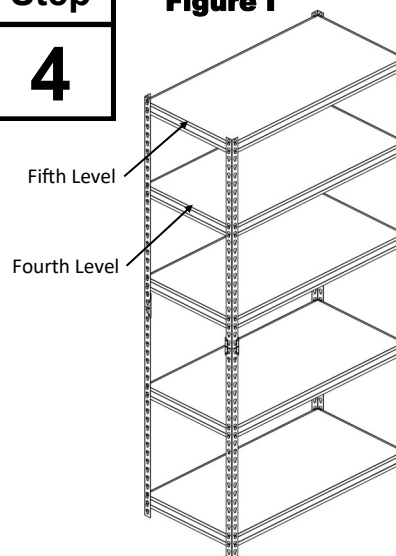

**Figure J**

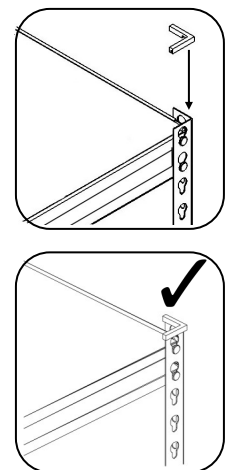

Add a wood shelf to the previously built level, then continue by adding the fourth and fifth level to the unit using two (2) beams and two (2) braces per level. Tap lightly to properly seat the rivets and add the final wood shelves to the unit (see figure I). Finally insert the four (4) remaining post caps to the top of each post (see figure J). Do a final inspection to make sure all rivets are securely seated into the narrow ends of the post slots. The assembly is now complete.