



4-SHELF STEEL STORAGE UNIT


30W x 12D x 60H

MODEL: UR301260PB4-B

IMPORTANT SAFETY INFORMATION

This unit should be placed on a level surface. Failure to do so can result in poor product performance or create a possible safety hazard. DO NOT CLIMB, STAND or USE THIS UNIT AS A LADDER. TO PREVENT TIPPING, ALWAYS SECURE TO A WALL WITH SUITABLE FASTENERS, NOT INCLUDED. DO NOT USE THIS UNIT TO STORE AQUARIUMS. CAUTION: CONTAINS SMALL PARTS, KEEP CHILDREN AWAY DURING INSTALLATION. USE TWO OR MORE PEOPLE TO ASSEMBLE AND MOVE THE UNIT TO AVOID INJURY. Do not use this unit for anything other than the manufacturer's intended purpose. Use care when working with metal parts, wear gloves for protection. Periodically inspect the unit to ensure brace/beam rivets are properly seated into post slots. Do not exceed the maximum weight capacity of 500 lbs. (226.7 kg) for each shelf level, not to exceed 2,000 lbs. (907.1 kg) for the entire shelving unit. Evenly distribute weight loads across entire shelf surface. Always store larger, heavier items on the bottom levels and small lighter items on the upper levels. This product is TSCA Title VI compliant. Keep this manual for future reference.

PARTS LIST

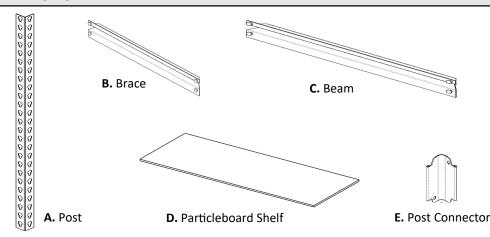

PARTS LIST		
Description	Qty	Part Number
A. Post	8	URPS30-BLK
B . Brace	8	URBR12-BLK
C. Beam	8	URBM30-BLK
D . Particleboard shelf	4	RPB31230-V3
E. Post Connector	4	PCIN-BLK
F. Post Cap	8	RL-PC-B1



PREPARATION

Before beginning assembly, read through the instructions and make sure all parts are present. Assembly of this unit is done by fitting the two rivets of the braces (B) and beams (C) into the keyhole slots of the post (A). The narrow end of the keyhole slots from the post must face down (see FIG. 1). Braces and beams must be installed with the ledge facing up on the inside. A rubber mallet should be used to tap down on the top of the braces and beams to properly seat the rivets down into the narrow end of the keyhole slots (see FIG. 2). Assemble the unit from bottom to top. It is recommended that the bottom shelf assembly be installed into the second keyhole slots at the bottom of the posts. The middle shelves should be evenly spaced. Be sure to install braces and beams at the same slot height for each shelf level.

Alternate Assembly: can be assembled as two individual 30" high shelving units. Each unit will have a top shelf level and a bottom shelf level (see FIG. 3). Follow assembly steps 2 and 3. repeating until both shelf levels are completed for each unit. Note: Use all 8 of Post Caps (F) in final step 7. Post Connectors (E) are not used for this setup.

Figure 1 Narrow end of slots face down 7



Figure 2 Rivets should be

seated at the bottom of the keyhole slots. Use a rubber mallet to tap down lightly onto the braces and beams to help seat the rivets.

WARRANTY

Edsal Manufacturing Company, LLC products are guaranteed for a period of one (1) year from the date of purchase. The SOLE AND EXCLUSIVE REMEDY for such defects is the repair or replacement of a defective product or parts thereof by Edsal Manufacturing Company, LLC or, at Edsal Manufacturing Company, LLC option, refund of the purchase price upon return of the item to Edsal Manufacturing Company, LLC. This warranty shall not apply in the event the products are damaged as a result of misuse, neglect, accident, moisture, improper application, improper assembly, or assembly not in conformity with the instructions of Edsal Manufacturing Company, LLC, failure to abide by safety precautions prescribed by Edsal Manufacturing Company, LLC or modification or repair by persons not authorized by Edsal Manufacturing Company, LLC.

Questions, problems, damage or missing parts? Contact us for assistance:



Chat: www.edsal.com



Email: support@edsal.com



Phone: 773-475-3131

Edsal Manufacturing Co., LLC 1555 W. 44th Street Chicago, IL 60609

US Patents & Patents Pending

Rev: C021323_v3

ASSEMBLY INSTRUCTIONS

